


(C) Sutcliffe Electronics	29-May-96
DIAWIRE6 DIACONS provisional BY: J.R.Sutcliffe	REV: 1 29-May-96 DOC No 2

DIACONS CONTROL BOX With External Siren

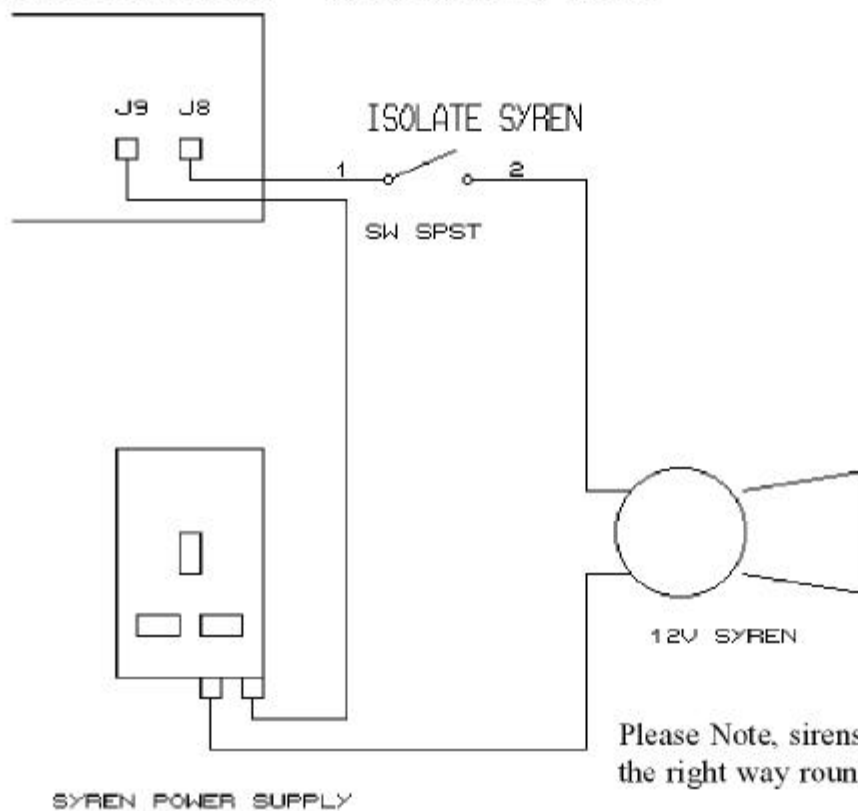

Please Note, sirens need to be connected the right way round to work.

When testing/setting up your siren, turn the Centre (function) knob to minimum, and the third Right hand (On Time) knob to about a quarter.  
When you are sure that all is going correctly, then set up the delay and on times to suit. -----eg 30secs delay. 10-15secs on time

When the delay is running, a red light is visible under the white Control box Label. When this turns off, the relay will switch and make your siren work.